




Controllers made simple for you !

Polypurpose siren

IP66 with Public Address (option)

PPS HD

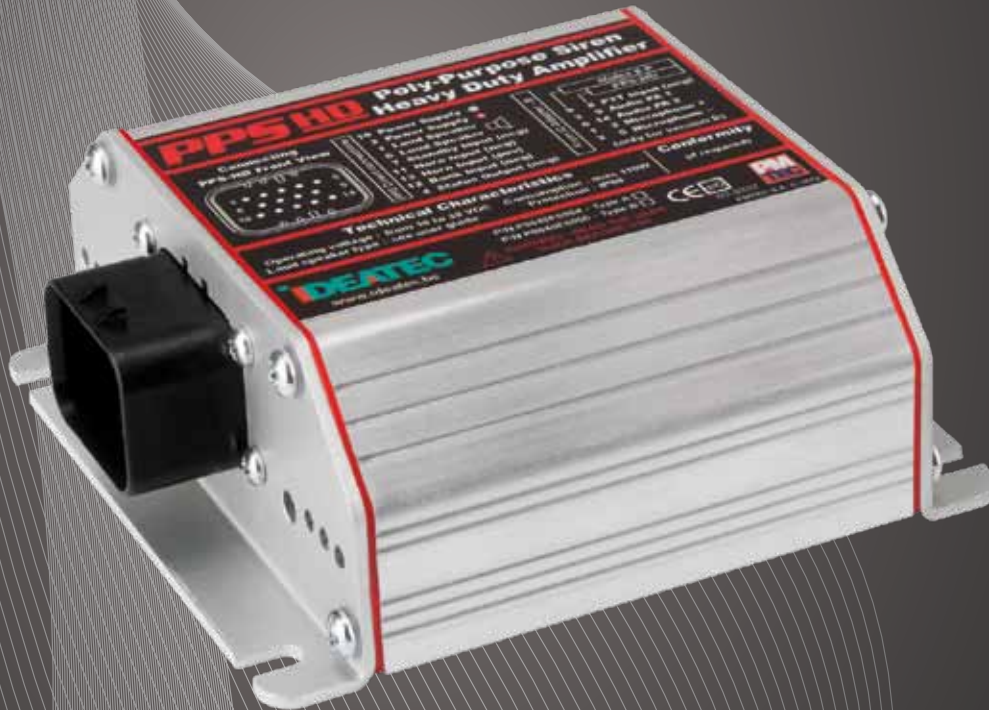

- Quick Install
- No Relay
- Manual Configuration
- PC Configuration
- Horn Input
- Real-Time Monitoring
- Bi Voltage
- 8-11-16 Ω Compatibility
- IP66 Amplifier
- Public Address

IDEATEC AUTOMOTIVE TOOLS
Console Express

Product	Operating voltage	Quiescent current	Output voltage	Number of inputs	Microphone
PPS HD	from 10 to 28VDC	from 13 to 17mA from 30 to 50mA (+PA)	Configurable from VBAT to 58 VDC	4	P.A. (option)

PPS HD A



PPS HD B

