

Gul= JU-HAL09A

Blå= JU-HAL09B

UNDERCOVER LED KIT



FEATURES

- Multi-Voltage Input 12~30VDC
- T.R.I. System (Triangular Reflective Illumination).
- Built-in 19 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable, and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant.

SPECIFICATIONS

Meets: SAE & Title XIII (flash patterns)

Bulb: 3W LED x 9 per Head (total 18LEDs)

Warning Patterns: 19 Flash Patterns

Operating Voltage: 12~30 VDC

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC
(varies with flash pattern)

Avg. Power: 15 Watts
(varies with flash pattern)

Max. Current: 1.9A @12.8VDC / 0.96A @25.6VDC

Max. Power: 25 Watts

Wires: Red-Vcc: 185cm (20AWG)
Black-GND: 185cm (20AWG)
Yellow-Flash Patterns & Sync: 185cm (20AWG)
White-Phase: 185cm (20AWG)

Fuse Recommended: 5A



Multi-Unit Synchronization: Over 15 units

Storage Temperature: -40°C to +80°C

Operating Temperature: -30°C to +65°C

Available in: RED , BLUE , AMBER , WHITE

DIMENSIONS

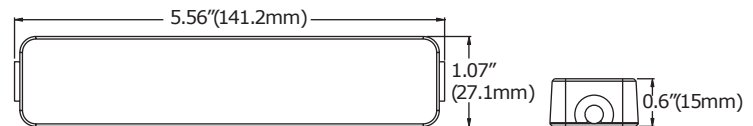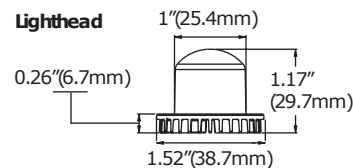

FLASH PATTERN

FP#	Flash Patterns		
0	Random (default)	10	Double (all)
1	Single (split)	11	Quad (all)
2	Double (split)	12	Quint (all)
3	Quad (split)	13	Mega (all)
4	Quint (split)	14	Ultra (all)
5	Mega (split)	15	Single-Quad (all)
6	Ultra (split)	16	Single H/L (all)
7	Single-Quad (split)	17	Steady 2 (california)
8	Single H/L (split)	18	Steady 4 (all)
9	Single (all)		

*SPLIT=Head1 alternate Head2 *ALL=all LEDs on

