


TOP

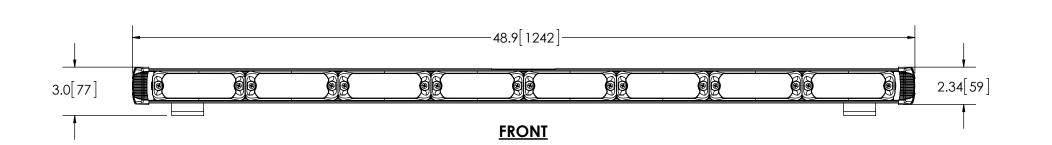

SPECIFICATIONS

CERTIFICATIONS: €; ECE R10; SAE J595(NOV 2008) CLASS
 YELLOW (AMBER);

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

2. FLASH MODE: WIG WAG: 120 ± 5 FLASHES PER MINUTE ALTERNATING: 120 ± 5 FLASHES PER MINUTE

- 3. VOLTAGE (NOMINAL): 12 to 24 VDC
- 4. VOLTAGE (EXTREME): 9.0 to 32 VDC
- 5. CURRENT (PEAK): 1.6A (@ 12 VDC NOMINAL)
- 6. POWER (MAXIMUM): 20.4W (@ 12 VDC NOMINAL)
- 7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- 8. CONNECTION: 2-16 AWG WIRES AND 55' CABLE
- 9. MOUNTING: MOUNTING KIT PROVIDED
- 10. BASE MATERIAL: ALUMINUM
- 11. LENS MATERIAL: POLYCARBONATE
- 12. PRODUCT WEIGHT: 7.2 LBS (3.24 Kg)

SCALE 1:6			ROVALS	DATE	Floatrania Cantrals Co				
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A			SNS	2014-09-25			833 West Diamond Street, Boise, ID 83705		
			MDH	2014-09-29	800-635-5900				
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE:			JLA	2014-09-25					
INCHES DECIMALS	± 0.5*		TJT	2014-10-13	SAFETY DIRECTOR,55',12-24V,LED,AMBER				
1.0mm	FRACTIONS	TEST ENG.	JRT	2014-10-14			PRODUCT SERIES:		
		SALES.	GLB	2014-10-03	-10-03			LD3300	
					SIZE: B DWG. NO.		ED335	ED3355A	
			Electronically Controlled Use Latest Copy			Project: LM13216	Date Cr	Created: 2014-09-09	
T	NERATED DRA MANUALLY UI EL REFERENCE RE IN INCHES, ANI DIERANCES ARE: INCHES DEGIMALS X.X. ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	INERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A RE IR INICHES, AND MILLIMETERS OLERANCES ARE: BICHES DECIMALS XX ± 0.01 XXX ± 0.04 XXXX ± 0.04 XXXX ± 0.04 XXXX ± 0.02 XXX ± 0.04 XXXX ± 0.02 XXX ± 0.04 XXXX ± 0.02	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A CHECKED EL RIS INICHES, AND MILLIMETERS OLERANCES ARE: MCH. ENG. ANGLES ANGLES ANGLES ANGLES ANGLES ANGLES ANGLE PROJECTION SALES.	INERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A EL REFERENCED:A CHECKED MDH MECH. BNG. JLA BECHES DECIMALS XX ± 0.1 XXX ± 0.04 XXXX ± 0.05 XXXX ± 0.04 XXXX ± 0.04 XXXX ± 0.04 XXXX ± 0.05 XXXX ± 0.04 XXXX ± 0.04 XXXX ± 0.05 XXXX ± 0.04 XXXX ± 0.04 SALES. GLB	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED: A CHECKED MDH 2014-09-25	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 SAFE BICHES DRCIMMAS XX ± 0.1 XXX ± 0.04 XXXX ± 0.05 XXX ±	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 SAFETY DIRECTO XX ± 0.01 XXX ± 0.04 XXX ± 0.05 XX ± 0.07 XXX ± 0.04 XXX ± 0.04 XXX ± 0.04 XXX ± 0.04 XXX ± 0.05 XXX ± 0.04 XXX ± 0.05 XXX ± 0.06 XXX	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 CHECKED MDH 2014-09-25 SAFETY DIRECTOR,55',12-2 XX ± 0.1 XXX ± 0.04 XXXX ± 0.05 XXX ± 0.05 XXX ± 0.05 XXX ± 0.05 XXX ± 0.06 XXXX ± 0.06 XXXX ± 0.07 XXX ± 0.08 XXX ± 0.08 XXX ± 0.09 XXX ± 0.00 XXXX ± 0.	NERATED DRAWING MANUALLY UPDATE. EL REFERENCED:A CHECKED MDH 2014-09-29 CHECKED MDH 2014-09-25 SAFETY DIRECTOR,55',12-24V,LED,AN XX ± 0.01 XXX ± 0.04 XXX ± 0.05 XXX ± 0.04 XXX ± 0.04 XXX ± 0.05 XXX ± 0.04 XXX ± 0.04 XXX ± 0.04 XXX ± 0.05 XXX ± 0.04 XXX ±

NOTES:
1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

THE DRAWNIC AND THE DESIGN AT DECLOSES ARE THE PRIVATE PROPERTY OF ECCO. AND IS ISSUED IN COMPIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWNICA AND 7 OF DESIGN MAY NOTE BLISD, COPPIDE REPRODUCED, OF OTHERWISE DISCLOSED IN FOR AS A WHOLE IN OUTSIDES OF USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWNING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS, © 2014 ECCO.

