

JS100-SP

Ultra-Thin Siren Speaker



FEATURES

- Slim (47.5 mm) and lightweight 100W speaker, ideal for limited-space installations.
- Durable design with cast aluminum housing and fiber-reinforced nylon front cover.
- Neodymium driver produces 117.6 dBA sound output.
- Tested for efficiency and reliability when paired with JULUEN siren amplifiers.
- Standard L-bracket and U-bracket available for versatile installation.

SPECIFICATIONS

Compliance: IP5K9K

Power Rating: 100W

Impedance (AC): 11 Ω

DC Resistance: 6 Ω

Weight: 1.89 KG (w/o Bracket)

Driver: Neodymium Magnet

Housing: Durable Metal Housing with a Glass-Filled Composite Cover


Operating Temperature: -30°C~65°C

Storage Temperature: -40°C~75°C

Wires: White (SPK+) - 30cm (18AWG)
Black (SPK-) - 30cm (18AWG)

Output (SPL): 117.6 dBA at 3 Meters(in Wail Tone)

DIMENSIONS

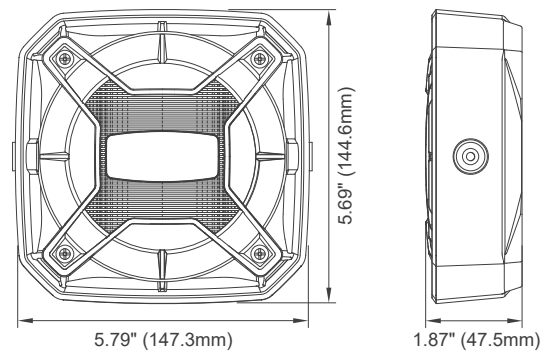

PART NO.

- H009-30110-000 (Speaker w/o Bracket)
- H009-31110-000 (Speaker w/ L-Bracket)
- H009-32110-000 (Speaker w/ U-Bracket)

ACCESSORIES

- 99-H009M00-000 (L-Bracket)



- 99-H009M01-000 (U-Bracket)



SOUND PRESSURE LEVEL

