

# 1.Wiring Instructions

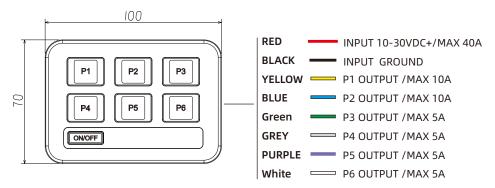

# 2.ENTER Programming Mode

#### 2.1:Latching/Momentary Setting

- To enter programming mode ensure that the controller is switched OFF.
- PRESS and HOLD the ON/OFF master switch button, whilst depressed, push the corresponding Switch that you would like to program from ON/ OFF latching to Momentary activation which will be confirmed by an audible tone.
- Repeat this procedure to program each of the 4 available switches.

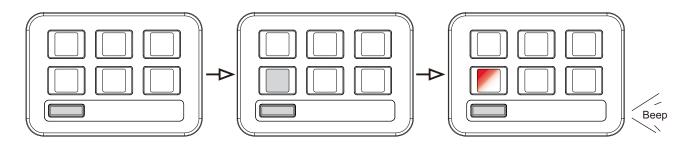


### 2.2:Master/Slave Setting(Group mode)

- Power on the controller, press and hold the button to be set as the master, keep it until a BEEP sound. Then press the button to be set as the slave.
- Cancellation: Power on, press and hold the master button, keep it until a BEEP sound, then press the slave button to cancel
- Remarks: After set successfully of Master/Salve button, the salve button can still be controlled independently.

**NOTE:** If the button is flashing the button is set as slave, if the button is constantly on the button is set as slave.

If a button is programmed as momentary the button can 't be used as slave, the button will be constantly on and if you press the master button (Momentary programmed) the button will not switch to flashing.

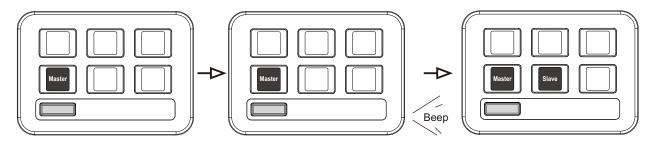

## 3. Mounting

3.1: 3M Sticker mount 3.2: Bracket mount

